

365ASC-30EXT
365ASC-30EXT-T

365ASC-30INT
365ASC-30INT-T

365ASC-45EXT
365ASC-45EXT-T



BID SPECIFICATIONS

STANDARD

- * DUAL USE SHOWCASE: CONVERTS FROM GELATO/ICE CREAM TO PASTRY/DELI WITH A PUSH OF A BUTTON
- * LED LIGHTING STANDARD
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETANHE FOAM
- * INSIDE STRUCUTRE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- * REAR SLIDING PLEXIGLASS DOOR
- * UNIQUE FAN ASSISTED AIRFLOW DESIGN
- * INCLINED DISPLAY
- * TILT BACK FRONT GLASS

- * ALL TEMPERED, DOUBLE PANE HEATED GLASS ON FRONT AND SIDES
- * SIDE PANELS IN SILVER PAINTED FINISH
- * FRONT LOWER GLASS FACIA COLORS (GLASS IS BACK PAINTED):

SILVER	CHAMPAGNE	BROWN	WHITE
- * MULTIPLEXING CAPABILITY WITH GELATO, PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * DISPLAY CASE(S) HAVE INTERGRATED ELECTRONIC TIME AND TEMPERATURE CONTROLLER(S) WITH HOT GAS DEFROST STANDARD ON GELATO MODELS
- * THE STANDARD LIMITED WARRANTY INCLUDES: 5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED

OPTIONAL

- * CASTERS
- * GRANITE WORK SURFACE (OPERATOR)
- * REMOTE CONDENSING UNIT
- * STAINLESS STEEL TEMPLATE TO ACCOMODATE 2.5 GALLON OR 3 GALLON ROUND ICE CREAM TUBS
- * SIDE PANELS IN CUSTOM COLOR OTHER THAN STOCK SILVER FINISH
- * END PANELS



- * LCD TOUCH PANEL CONTROL, CONTROLS 1-5 CASES (IF THEY ARE JOINED)



- * PANS NOT INCLUDED



- * SIDE PANELS PAINTED IN A GLOSSY FINISH



STANDARD END PANEL



NO DECORATIVE END PANEL AVAILABLE IN 365

365 All Season - Convertible Curved Case Technical Specifications

Converts from Low Temp Gelato to Med Temp Pastry

Model no.	Factory Code	Case Height	*Case Length	Case Depth	Crated Weight (lb)	Line Voltage	Breaker Size	Amp Draw	Working Temp F	Pastry Working Temp	Comp. HP
365ASC-30EXT	TS A30	49.25"	*A & B*	47.44"	1020	220/1/60	20amps	15	-10 to +10	38*	1 1/2 HP
365ASC-30EXT-T	TS A30	55.25"	*A & B*	47.44"	1020	220/1/60	20amps	15	-10 to +10	38*	1 1/2 HP
365ASC-30INT	TS C30	49.25"	*A & B*	47.44"	1020	220/1/60	20amps	15	-10 to +10	38*	1 1/2 HP
365ASC-30INT-T	TS C30	55.25"	*A & B*	47.44"	1020	220/1/60	20amps	15	-10 to +10	38*	1 1/2 HP
365ASC-45EXT	TS A45	49.25"	*A & B*	47.44"	844	220/1/60	20amps	15	-10 to +10	38*	1 1/2 HP
365ASC-45EXT-T	TS A45	55.25"	*A & B*	47.44"	844	220/1/60	20amps	15	-10 to +10	38*	1 1/2 HP


T = Tall (55.25" HIGH)

* Optional: Autodiagnosis & Touch Pad

* Case lengths are specified with standard end panels




A - Customer Side
365ASC-30EXT = 63.54"

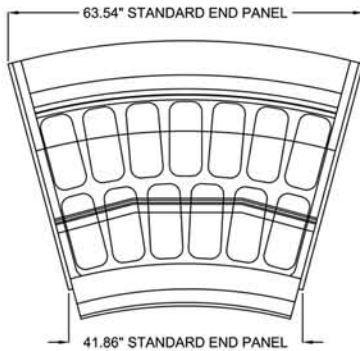


B - Server Side
365ASC-30EXT = 41.86"

A - Customer Side
365ASC-30INT = 36.81"

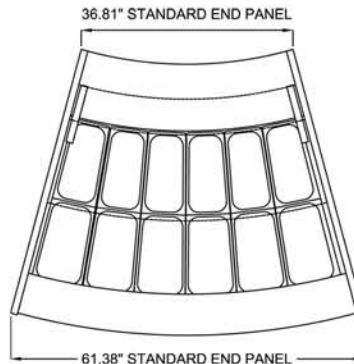

B - Server Side
365ASC-30INT = 61.38"

A - Customer Side
365ASC-45EXT = 59.95"

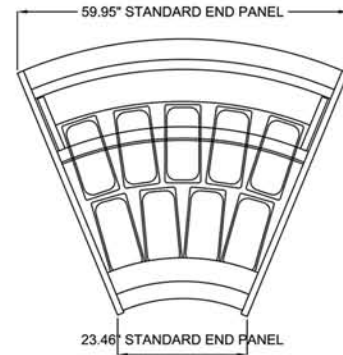

B - Server Side
365ASC-45EXT = 23.46"

PLAN / TOP VIEWS OF CORNER CASES

LISTINGS:



ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO North America, LLC
33300 Central Avenue
Union City, CA 94587 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-usa.com>