

365ASC-30EXT
365ASC-30EXT-T

365ASC-30INT
365ASC-30INT-T

365ASC-45EXT
365ASC-45EXT-T



BID SPECIFICATIONS


STANDARD

- * DUAL USE SHOWCASE: CONVERTS FROM GELATO/ICE CREAM TO PASTRY/DELI WITH A PUSH OF A BUTTON
- * LED LIGHTING STANDARD
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETANE FOAM
- * INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- * REAR SLIDING PLEXIGLAS DOOR
- * UNIQUE FAN ASSISTED AIRFLOW DESIGN
- * INCLINED DISPLAY
- * TILT BACK FRONT GLASS
- * MULTIPLEXING CAPABILITY WITH PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- * ALL TEMPERED, DOUBLE PANE HEATED GLASS ON FRONT AND SIDES
- * SIDE PANELS IN SILVER PAINTED FINISH
- * FRONT LOWER GLASS FACIA COLORS (GLASS IS BACK PAINTED):

| | | | |
|--------|-----------|-------|-------|
| | | | |
| SILVER | CHAMPAGNE | BROWN | WHITE |
- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * DISPLAY CASE(S) HAVE INTEGRATED ELECTRONIC TIME AND TEMPERATURE CONTROLLER(S) WITH HOT GAS DEFROST STANDARD ON GELATO MODELS
- * THE STANDARD LIMITED WARRANTY INCLUDES: 5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED

OPTIONAL


- * CASTERS
- * GRANITE WORK SURFACE (OPERATOR)
- * REMOTE CONDENSING UNIT
- * STAINLESS STEEL TEMPLATE TO ACCOMMODATE 2.5 GALLON OR 3 GALLON ROUND ICE CREAM TUBS
- * SIDE PANELS IN CUSTOM COLOR OTHER THAN STOCK SILVER FINISH
- * END PANELS
- * LCD TOUCH PANEL CONTROL, CONTROLS 1-5 CASES (IF THEY ARE JOINED)
- * PANS NOT INCLUDED
- * SIDE PANELS PAINTED IN A GLOSSY FINISH



STANDARD END PANEL



NO DECORATIVE END PANEL AVAILABLE IN 365



365 Convertible Curved Case Technical Specifications


Converts from Low Temp Gelato to Med Temp Pastry

| Model no. | Factory Code | Case Height | *Case Length | Case Depth | Crated Weight (lb) | Line Voltage | Breaker Size | Amp Draw | Working Temp F | Pastry Working Temp | Comp. HP |
|----------------|--------------|-------------|--------------|------------|--------------------|--------------|--------------|----------|----------------|---------------------|----------|
| 365ASC-30EXT | TS A30 | 49.25" | *A & B* | 47.44" | 1020 | 220/1/60 | 20amps | 15 | -10 to +10 | 38* | 1 1/2 HP |
| 365ASC-30EXT-T | TS A30 | 55.25" | *A & B* | 47.44" | 1020 | 220/1/60 | 20amps | 15 | -10 to +10 | 38* | 1 1/2 HP |
| 365ASC-30INT | TS C30 | 49.25" | *A & B* | 47.44" | 1020 | 220/1/60 | 20amps | 15 | -10 to +10 | 38* | 1 1/2 HP |
| 365ASC-30INT-T | TS C30 | 55.25" | *A & B* | 47.44" | 1020 | 220/1/60 | 20amps | 15 | -10 to +10 | 38* | 1 1/2 HP |
| 365ASC-45EXT | TS A45 | 49.25" | *A & B* | 47.44" | 844 | 220/1/60 | 20amps | 15 | -10 to +10 | 38* | 1 1/2 HP |
| 365ASC-45EXT-T | TS A45 | 55.25" | *A & B* | 47.44" | 844 | 220/1/60 | 20amps | 15 | -10 to +10 | 38* | 1 1/2 HP |


T = Tall (55.25" HIGH)

Optional: Autodiagnosis & Touch Pad


* Case lengths are specified with standard end panels

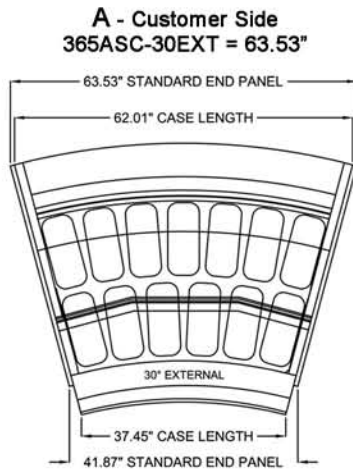

B - Server Side
365ASC-30EXT = 41.87"

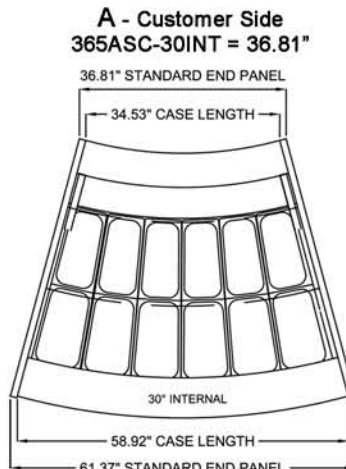

B - Server Side
365ASC-30INT = 61.37"

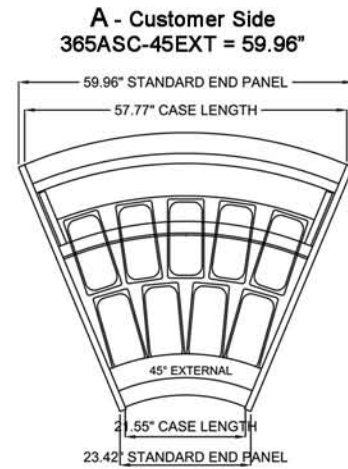

B - Server Side
365ASC-45EXT = 23.42"

PLAN / TOP VIEWS OF CORNER CASES

LISTINGS:



ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO North America, LLC
33300 Central Avenue
Union City, CA 94587 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-usa.com>