

365G-30EXT  
365G-30EXT-T

365G-30INT  
365G-30INT-T

365G-45EXT  
365G-45EXT-T



### BID SPECIFICATIONS

STANDARD

- \* LED LIGHTING STANDARD
- \* GALVANIZED STEEL CHASSIS CONSTRUCTION
- \* INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- \* INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- \* DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- \* REAR SLIDING PLEXIGLAS DOOR
- \* AIR-COOLED CONDENSING UNIT
- \* MULTIPLEXING CAPABILITY WITH PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- \* UNIQUE FAN ASSISTED AIRFLOW DESIGN
- \* INCLINED DISPLAY
- \* REMOVABLE STAINLESS STEEL DECK
- \* TILT BACK FRONT GLASS
- \* ALL TEMPERED, DOUBLE PANE HEATED GLASS ON FRONT AND SIDES
- \* SIDE PANELS IN SILVER PAINTED FINISH
- \* FRONT LOWER GLASS FACIA COLORS (GLASS IS BACK PAINTED):
 

SILVER	CHAMPAGNE	BROWN	WHITE
- \* DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- \* DISPLAY CASE(S) HAVE INTERGRATED ELECTRONIC TIME AND TEMPERATURE CONTROLLER(S) WITH HOT GAS DEFROST STANDARD ON GELATO MODELS
- \* THE STANDARD LIMITED WARRANTY INCLUDES:  
5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- \* DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED

OPTIONAL


- \* CASTERS
- \* GRANITE WORK SURFACE (OPERATOR SIDE)
- \* REMOTE CONDENSING UNIT
- \* SIDE PANELS IN CUSTOM COLOR OTHER THAN STOCK SILVER FINISH
- \* END PANELS
- \* STAINLESS STEEL TEMPLATE TO ACCOMODATE 2.5 GALLON OR 3 GALLON ROUND ICE CREAM TUBS
- \* PANS NOT INCLUDED
- \* SIDE PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)



STANDARD END PANEL





NO DECORATIVE END PANEL AVAILABLE IN 365



## 365 Gelato / Ice Cream Curved Case Technical Specifications

Model no.	Factory Code	Case Height	*Case Length	Case Depth	Crated Weight (lb)	Line Voltage	Breaker Size	Amp Draw	BTU		Pan Capacity		
									-20 Evap Temp (R404a)	Working Temp F	5 Liter	12 Liter	Comp. HP
365G-30EXT	G A30	49.25"	*A & B*	47.44"	850	220/1/60	20amps	10	5300	-10 to +10	12	8	1 1/2 HP
365G-30EXT-T	G A30	55.25"	*A & B*	47.44"	895	220/1/60	20amps	10	5300	-10 to +10	12	8	1 1/2 HP
365G-30INT	G C30	49.25"	*A & B*	47.44"	850	220/1/60	20amps	10	5300	-10 to +10	12	8	1 1/2 HP
365G-30INT-T	G C30	55.25"	*A & B*	47.44"	895	220/1/60	20amps	10	5300	-10 to +10	12	8	1 1/2 HP
365G-45EXT	G A45	49.25"	*A & B*	47.44"	720	220/1/60	20amps	10	4100	-10 to +10	9	5	1 1/2 HP
365G-45EXT-T	G A45	55.25"	*A & B*	47.44"	765	220/1/60	20amps	10	4100	-10 to +10	9	5	1 1/2 HP

T = Tall (55.25" HIGH) \* Case lengths are specified with standard end panels

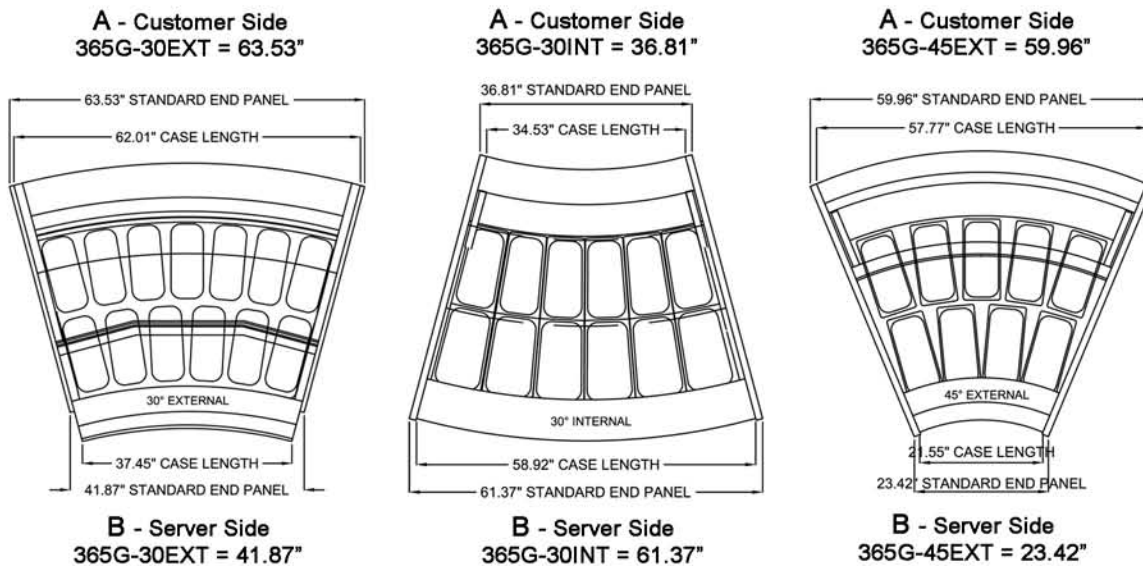

### PLAN / TOP VIEWS OF CORNER CASES

#### LISTINGS:



#### ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation  
Options exist for several NEMA configurations  
Plug and/or receptacle configurations are at the discretion of the electrical installer

#### NOTE:

Required ambient conditions: 75°F; 55% RH  
Drawing and Specifications are subject to change without notice

CLABO North America, LLC  
33300 Central Avenue  
Union City, CA 94587 USA  
PH 800.672.2784  
FAX 510.441.0401  
<http://www.otl-usa.com>