

N40

N50

N60

NA30




BID SPECIFICATIONS

STANDARD

- * DOUBLE PANE SLIDING GLASS BACK DOOR
- * DOUBLE PANE GLASS FRONT AND SIDES
- * HYDRAULIC LIFT UP FRONT GLASS
- * BACK & INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- * SILVER ANODIZED ALUMINUM FINISH
- * INCLINE SHELF CAPABILITIES
- * MULTIPLEXING CAPABILITY WITH GELATO, PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS

- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * THE STANDARD LIMITED WARRANTY INCLUDES:
1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED

Easy Delivery




Only 35.25" Deep


OPTIONAL

- * CASTERS
- * PLEXIGLASS SHELF PRODUCT GUARD
- * DECORATIVE END PANELS

- * SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)



STANDARD END PANEL



DECORATIVE END PANEL (OPTIONAL)
ADD 1.50" TO TOTAL LENGTH




Italiana Neutral / Dry Case Technical Specifications

No Heat or cooling

Models	Case Height	* Case Lengths	Depth	Crated Weights (lb)	Line Voltage	Breaker Size	Amp Draws	Working Temp
N40	54.00"	41.50"	35.25"	750	115/1/60	20 amp	2	Ambient
N50	54.00"	51.50"	35.25"	863	115/1/60	20 amp	3	Ambient
N60	54.00"	61.50"	35.25"	951	115/1/60	20 amp	4	Ambient
NA30	54.00"	* A & B *	35.25"	885	115/1/60	20 amp	2	Ambient

* Case lengths are specified with standard end panels

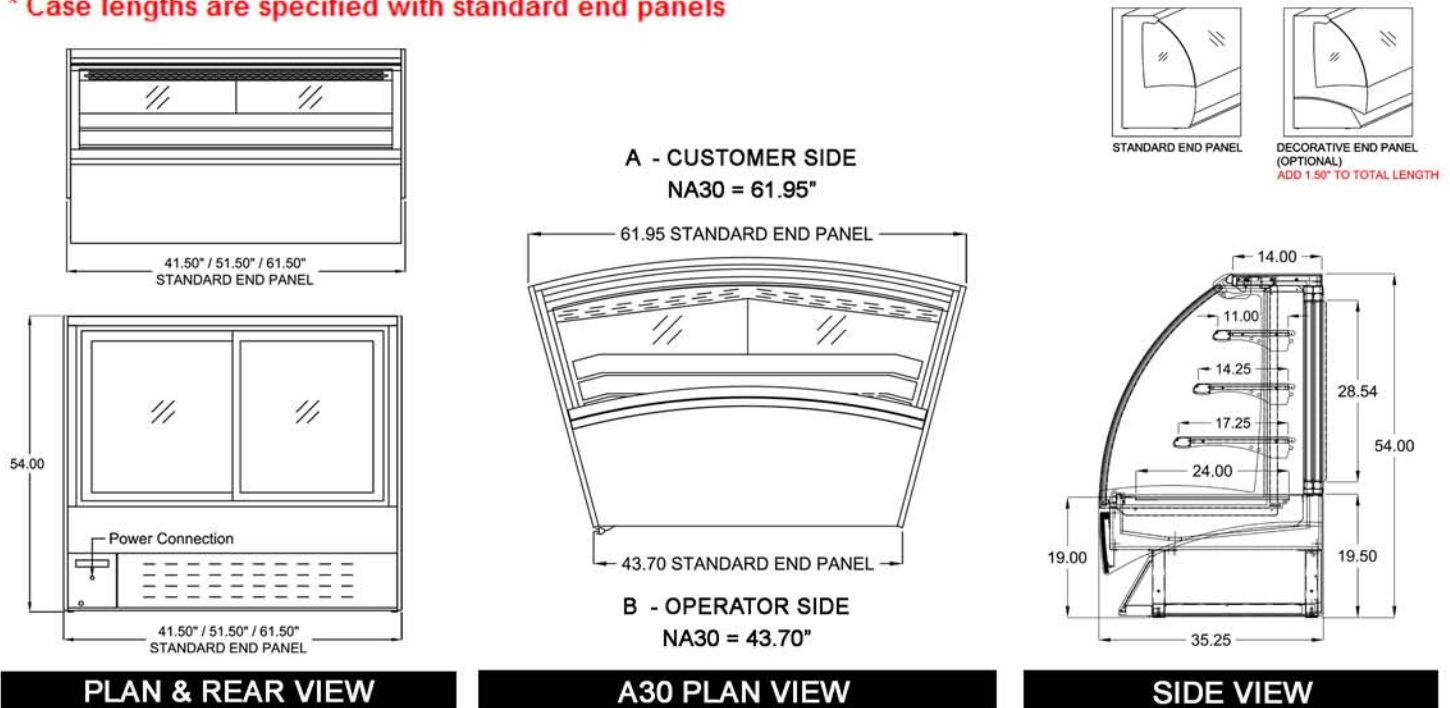

LISTINGS:



ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO North America, LLC
33300 Central Avenue
Union City, CA 94587 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-usa.com>