

KC15EXT

KC15INT


KC30EXT  
KC30EXT-T

KC30INT  
KC30INT-T

KC45EXT  
KC45EXT-T



Available Heights:	
52.75"	57.75"

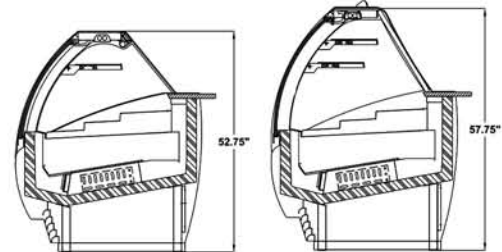

### BID SPECIFICATIONS

STANDARD

- \* ALL TEMPERED, DOUBLE PANE GLASS FRONT AND SIDES
- \* GALVANIZED STEEL CHASSIS CONSTRUCTION
- \* INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- \* INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- \* STAINLESS STEEL WORK SURFACE
- \* DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- \* REAR PLEXIGLASS SLIDING DOORS
- \* AIR-COOLED CONDENSING UNIT
- \* UNIQUE FAN ASSISTED AIRFLOW DESIGN

- \* FRONT GLASS OPENS UPWARD
- \* DIGITAL HUMIDITY CONTROL ON REFRIGERATED DECK, NON-REFRIGERATED SHELVES
- \* SILVER ANODIZED ALUMINUM TRIM
- \* MULTIPLEXING CAPABILITY WITH GELATO, PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- \* DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- \* THE STANDARD LIMITED WARRANTY INCLUDES: 5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- \* DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED



OPTIONAL

- \* FULLY REFRIGERATED SHOWCASE OPTION
- \* DOUBLE PANE SLIDING BACK DOOR AVAILABLE ON LOWER CASE MODEL
- \* CASTERS
- \* GRANITE WORK SURFACE (OPERATOR SIDE)
- \* CHROME STUDS IN FRONT PANEL
- \* CHAMPAGNE ANODIZED ALUMINUM TRIM
- \* REMOTE CONDENSING UNIT

- \* SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)








- \* DECORATIVE SIDE PANELS



### Korea Chocolate Curved Refrigerated Case Technical Specifications

Updated Model no.	Case Height	*Case Length	Case Depth	Crated Weight	Line Voltage	Breaker Size	Amp Draw	Working Temp	Comp. HP	Shelves
KC15EXT	52.75"	*A & B*	44.33"	1152 lbs	115/1/60	20amps	10	57	1/2 HP	1
KC15INT	52.75"	*A & B*	44.33"	1152 lbs	115/1/60	20amps	10	57	1/2 HP	1
KC30EXT	52.75"	*A & B*	44.33"	1020 lbs	115/1/60	20amps	10	57	1/2 HP	1
KC30EXT-T	57.75"	*A & B*	44.33"	1020 lbs	115/1/60	20amps	10	57	1/2 HP	2
KC30INT	52.75"	*A & B*	44.33"	1020 lbs	115/1/60	20amps	10	57	1/2 HP	1
KC30INT-T	57.75"	*A & B*	44.33"	1020 lbs	115/1/60	20amps	10	57	1/2 HP	2
KC45EXT	52.75"	*A & B*	44.33"	844 lbs	115/1/60	20amps	10	57	1/2 HP	1
KC45EXT-T	57.75"	*A & B*	44.33"	844 lbs	115/1/60	20amps	10	57	1/2 HP	2

T = TALL \* Case lengths are specified with standard end panels

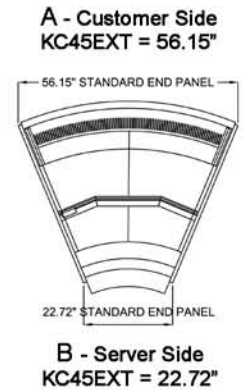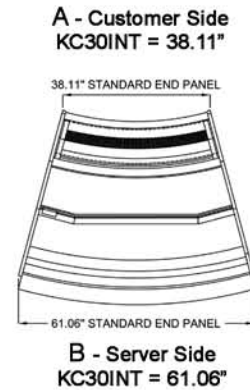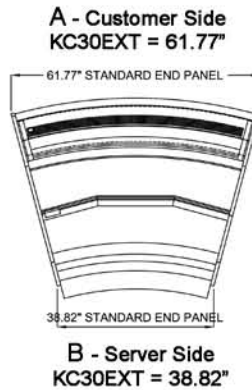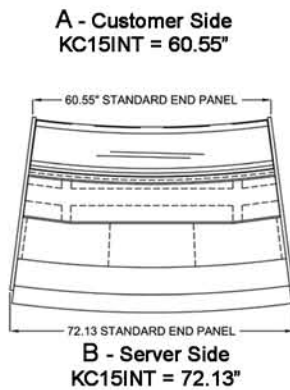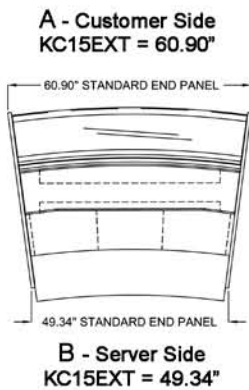

### PLAN / TOP VIEWS of CORNER CASES

#### LISTINGS:



#### ELECTRICAL CONNECTION

Display cases are shipped with applicable junction box for hardwired installation  
Options exist for several NEMA configurations  
Plug and/or receptacle configurations are at the discretion of the electrical installer

#### NOTE:

Required ambient conditions: 75°F; 55% RH  
Drawing and Specifications are subject to change without notice

CLABO North America, LLC  
33300 Central Avenue  
Union City, CA 94587 USA  
PH 800.672.2784  
FAX 510.441.0401  
<http://www.otl-usa.com>