

# KOREIA

## DELI CURVED SHOWCASE

KD15EXT  
KD15EXT-T

KD15INT  
KD15INT-T


KD30EXT  
KD30EXT-T

KD30INT  
KD30INT-T

KD45EXT  
KD45EXT-T



Available Heights:	
52.75"	57.75"

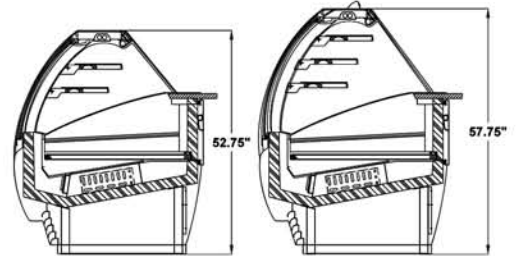

### BID SPECIFICATIONS

STANDARD

- \* ALL TEMPERED, DOUBLE PANE GLASS FRONT AND SIDES
- \* GALVANIZED STEEL CHASSIS CONSTRUCTION
- \* INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- \* INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- \* STAINLESS STEEL WORK SURFACE
- \* DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- \* REAR PLEXIGLAS SLIDING DOORS
- \* AIR-COOLED CONDENSING UNIT

- \* UNIQUE FAN ASSISTED AIRFLOW DESIGN
- \* HYDRAULIC FRONT GLASS OPENS UPWARD
- \* REFRIGERATED DECK, NON-REFRIGERATED SHELVES
- \* SILVER ANODIZED ALUMINUM TRIM
- \* MULTIPLEXING CAPABILITY WITH GELATO, PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- \* DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- \* THE STANDARD LIMITED WARRANTY INCLUDES:  
5 YEAR COMPRESSOR: 1 YEAR PARTS; 90 DAYS LABOR
- \* DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED


OPTIONAL

- \* FULLY REFRIGERATED SHOWCASE OPTION
- \* DOUBLE PANE SLIDING BACK DOOR AVAILABLE ON LOWER CASE MODEL
- \* CASTERS
- \* GRANITE WORK SURFACE (OPERATOR SIDE)
- \* CHROME STUDS IN FRONT PANEL
- \* CHAMPAGNE ANODIZED ALUMINUM TRIM
- \* REMOTE CONDENSING UNIT


- \* SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)



- \* DECORATIVE SIDE PANELS



STANDARD END PANEL




DECORATIVE END PANEL (OPTIONAL)


### Koreaia Deli Curved Refrigerated Cases Technical Specifications

Updated Model no.	Old Model No.	Factory Code	Case Height	*Case Length	Case Depth	Crated Weight (lb)	Line Voltage	Breaker Size	Amp Draw	Working Temp F	Comp. HP	Shelves
KD15EXT	C87K-15*EXT	RVS 15A	52.75"	*A & B*	44.33"	1152	115/1/60	20amps	10	38	1/2 HP	2
KD15EXT-T	C87K-15*EXT	RVS 15A	57.75"	*A & B*	44.33"	1152	115/1/60	20amps	10	38	1/2 HP	3
KD15INT	C87K-15*INT	RVS 15C	52.75"	*A & B*	44.33"	1152	115/1/60	20amps	10	38	1/2 HP	2
KD15INT-T	C87K-15*INT	RVS 15C	57.75"	*A & B*	44.33"	1152	115/1/60	20amps	10	38	1/2 HP	3
KD30EXT	C87K-30*EXT	RVS 30A	52.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	2
KD30EXT-T	C87K-30*EXT	RVS 30A	57.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	3
KD30INT	C87K-30*INT	RVS 30C	52.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	2
KD30INT-T	C87K-30*INT	RVS 30C	57.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	3
KD45EXT	C87K-45*EXT	RVS 45A	52.75"	*A & B*	44.33"	844	115/1/60	20amps	10	38	1/2 HP	2
KD45EXT-T	C87K-45*EXT	RVS 45A	57.75"	*A & B*	44.33"	844	115/1/60	20amps	10	38	1/2 HP	3

T = TALL




STANDARD END PANEL



DECORATIVE END PANEL (OPTIONAL)


\*Case lengths are specified with standard end panels

A - Customer Side  
KD15EXT = 61.04"

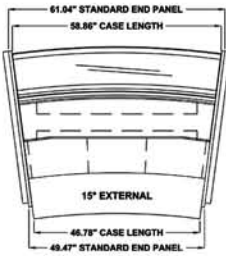


B - Server Side  
KD15EXT = 49.47"

A - Customer Side  
KD15INT = 60.53"

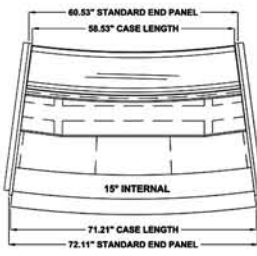


B - Server Side  
KD15INT = 72.11"

A - Customer Side  
KD30EXT = 61.77"

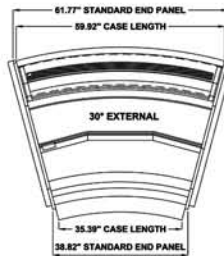


B - Server Side  
KD30EXT = 38.82"

A - Customer Side  
KD30INT = 38.11"

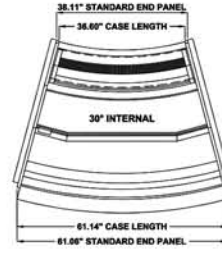

B - Server Side  
KD30INT = 61.06"


A - Customer Side  
KD45EXT = 56.12"

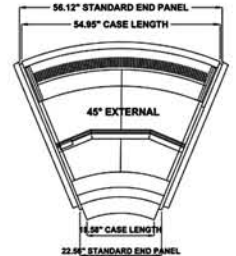

B - Server Side  
KD45EXT = 22.56"

### PLAN / TOP VIEWS of CORNER CASES

#### LISTINGS:



#### ELECTRICAL CONNECTION

Display cases are shipped with applicable junction box for hardwired installation  
Options exist for several NEMA configurations  
Plug and/or receptacle configurations are at the discretion of the electrical installer

#### NOTE:

Required ambient conditions: 75°F; 55% RH  
Drawing and Specifications are subject to change without notice

CLABO North America, LLC  
33300 Central Avenue  
Union City, CA 94587 USA  
PH 800.672.2784  
FAX 510.441.0401  
<http://www.otl-usa.com>