

KD15EXT


KD15INT

KD30EXT
KD30EXT-T

KD30INT
KD30INT-T

KD45EXT
KD45EXT-T

Available Heights:	
52.75"	57.75"

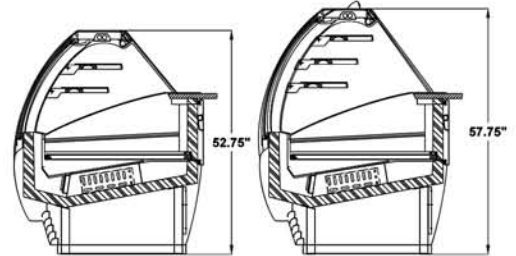

BID SPECIFICATIONS

STANDARD

- * ALL TEMPERED, DOUBLE PANE GLASS FRONT AND SIDES
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- * INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * STAINLESS STEEL WORK SURFACE
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- * REAR PLEXIGLASS SLIDING DOORS
- * AIR-COOLED CONDENSING UNIT
- * UNIQUE FAN ASSISTED AIRFLOW DESIGN

- * HYDRAULIC FRONT GLASS OPENS UPWARD
- * REFRIGERATED DECK, NON-REFRIGERATED SHELVES
- * SILVER ANODIZED ALUMINUM TRIM
- * MULTIPLEXING CAPABILITY WITH GELATO, PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * THE STANDARD LIMITED WARRANTY INCLUDES: 5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED


OPTIONAL

- * FULLY REFRIGERATED SHOWCASE OPTION
- * DOUBLE PANE SLIDING BACK DOOR AVAILABLE ON LOWER CASE MODEL
- * CASTERS
- * GRANITE WORK SURFACE (OPERATOR SIDE)
- * CHROME STUDS IN FRONT PANEL
- * CHAMPAGNE ANODIZED ALUMINUM TRIM
- * REMOTE CONDENSING UNIT


- * SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)



- * DECORATIVE SIDE PANELS



STANDARD END PANEL




DECORATIVE END PANEL (OPTIONAL)

Korea Deli Curved Refrigerated Cases Technical Specifications

Updated Model no.	Old Model No.	Factory Code	Case Height	*Case Length	Case Depth	Crated Weight (lb)	Line Voltage	Breaker Size	Amp Draw	Working Temp F	Comp. HP	Shelves
KD15EXT	C87K-15*EXT	RVS 15A	52.75"	*A & B*	44.33"	1152	115/1/60	20amps	10	38	1/2 HP	2
KD15INT	C87K-15*INT	RVS 15C	52.75"	*A & B*	44.33"	1152	115/1/60	20amps	10	38	1/2 HP	2
KD30EXT	C87K-30*EXT	RVS 30A	52.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	2
KD30EXT-T	C87K-30*EXT	RVS 30A	57.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	3
KD30INT	C87K-30*INT	RVS 30C	52.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	2
KD30INT-T	C87K-30*INT	RVS 30C	57.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	3
KD45EXT	C87K-45*EXT	RVS 45A	52.75"	*A & B*	44.33"	844	115/1/60	20amps	10	38	1/2 HP	2
KD45EXT-T	C87K-45*EXT	RVS 45A	57.75"	*A & B*	44.33"	844	115/1/60	20amps	10	38	1/2 HP	3

T = TALL * Case lengths are specified with standard end panels




STANDARD END PANEL




DECORATIVE END PANEL (OPTIONAL)

A - Customer Side
KD15EXT = 60.90"




B - Server Side
KD15EXT = 49.34"

A - Customer Side
KD15INT = 60.55"




B - Server Side
KD15INT = 72.13"

A - Customer Side
KD30EXT = 61.77"




B - Server Side
KD30EXT = 38.82"

A - Customer Side
KD30INT = 38.11"



B - Server Side
KD30INT = 61.06"


A - Customer Side
KD45EXT = 56.15"



B - Server Side
KD45EXT = 22.72"

PLAN / TOP VIEWS of CORNER CASES

LISTINGS:



ELECTRICAL CONNECTION

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO North America, LLC
33300 Central Avenue
Union City, CA 94587 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-usa.com>