

KG15EXT
KG15EXT-T


KG15INT
KG15INT-T

KG30EXT
KG30EXT-T

KG30INT
KG30INT-T

KG45EXT
KG45EXT-T

Available Heights:	
52.75"	57.75"

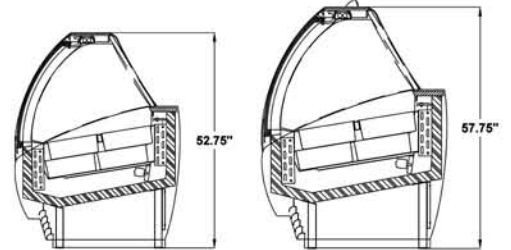


BID SPECIFICATIONS

STANDARD

- * ALL TEMPERED, DOUBLE PANE HEATED GLASS ON FRONT AND SIDES
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- * BACK & INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- * REAR PLEXIGLAS SLIDING DOORS
- * AIR-COOLED CONDENSING UNIT
- * UNIQUE FAN ASSISTED AIRFLOW DESIGN
- * INCLINED DISPLAY
- * REMOVABLE STAINLESS STEEL DECK
- * HYDRAULIC LIFT UP FRONT GLASS
- * MULTIPLEXING CAPABILITY WITH PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- * RESERVE PAN STORAGE
- * SILVER ANODIZED ALUMINUM TRIM
- * STAINLESS STEEL WORK SURFACE
- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * DISPLAY CASE(S) HAVE INTERGRATED ELECTRONIC TIME AND TEMPERATURE CONTROLLER(S) WITH HOT GAS DEFROST STANDARD ON GELATO MODELS
- * THE STANDARD LIMITED WARRANTY INCLUDES:
5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED

OPTIONAL


- * CASTERS
- * GRANITE WORK SURFACE (OPERATOR SIDE)
- * CHROME STUDS IN FRONT PANEL
- * CHAMPAGNE ANODIZED ALUMINUM TRIM
- * REMOTE CONDENSING UNIT
- * DECORATIVE SIDE PANELS
- * STAINLESS STEEL TEMPLATE TO ACCOMMODATE 2.5 GALLON OR 3 GALLON ROUND ICE CREAM TUBS
- * PANS NOT INCLUDED




STANDARD END PANEL



DECORATIVE END PANEL (OPTIONAL)



- * SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)

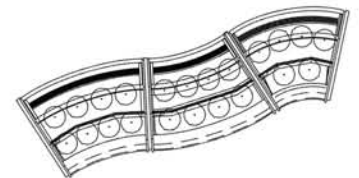


Korea Gelato / Ice Cream Curved Case Technical Specifications


Curved Cold Cases

Updated Model no.	Old Model No.	Factory Code	Case Height	*Case Length	Case Depth	Crated Weight (lb)	Line Voltage	Breaker Size	Amp Draw	BTU		Pan Capacity			Comp. HP
										-20 Evap Temp (R404a)	Working Temp F	5 Liter	12 Liter	Rounds	
KG15EXT	C83FK-15*EXT	GA15	52.75"	*A & B*	44.33"	1152	220/1/60	20amps	10	3069	-10 to + 10	14	9	9	1 1/2 HP
KG15EXT-T	C83FK-15*EXT	GA15	57.75"	*A & B*	44.33"	1152	220/1/60	20amps	10	3069	-10 to + 10	14	9	9	1 1/2 HP
KG15INT	C83FK-15*INT	GC15	52.75"	*A & B*	44.33"	1152	220/1/60	20amps	10	6138	-10 to + 10	18	10	11	2 HP
KG15INT-T	C83FK-15*INT	GC15	57.75"	*A & B*	44.33"	1152	220/1/60	20amps	10	6138	-10 to + 10	18	10	11	2 HP
KG30EXT	C83FK-30*EXT	GA30	52.75"	*A & B*	44.33"	1020	220/1/60	20amps	10	3069	-10 to + 10	12	8	8	1 1/2 HP
KG30EXT-T	C83FK-30*EXT	GA30	57.75"	*A & B*	44.33"	1020	220/1/60	20amps	10	3069	-10 to + 10	12	8	8	1 1/2 HP
KG30INT	C83FK-30*INT	GC30	52.75"	*A & B*	44.33"	1020	220/1/60	20amps	10	3069	-10 to + 10	12	8	8	1 1/2 HP
KG30INT-T	C83FK-30*INT	GC30	57.75"	*A & B*	44.33"	1020	220/1/60	20amps	10	3069	-10 to + 10	12	8	8	1 1/2 HP
KG45EXT	C83FK-45*EXT	GA45	52.75"	*A & B*	44.33"	844	220/1/60	20amps	10	3069	-10 to + 10	9	5	6	1 1/2 HP
KG45EXT-T	C83FK-45*EXT	GA45	57.75"	*A & B*	44.33"	844	220/1/60	20amps	10	3069	-10 to + 10	9	5	6	1 1/2 HP

T = TALL




STANDARD END PANEL



DECORATIVE END PANEL (OPTIONAL)


*Case lengths are specified with standard end panels

A - Customer Side
KG15EXT = 61.00"




B - Server Side
KG15EXT = 49.42"

A - Customer Side
KG15INT = 60.42"




B - Server Side
KG15INT = 72.00"

A - Customer Side
KG30EXT = 61.73"




B - Server Side
KG30EXT = 38.76"

A - Customer Side
KG30INT = 38.11"



B - Server Side
KG30INT = 61.06"

A - Customer Side
KG45EXT = 56.65"



B - Server Side
KG45EXT = 23.39"

PLAN / TOP VIEWS OF CORNER CASES

LISTINGS:



ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO North America, LLC
33300 Central Avenue
Union City, CA 94587 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-usa.com>