

KP15EXT
KP15EXT-T

KP15INT
KP15INT-T


KP30EXT
KP30EXT-T

KP30INT
KP30INT-T

KP45EXT
KP45EXT-T



Available Heights:	
52.75"	57.75"

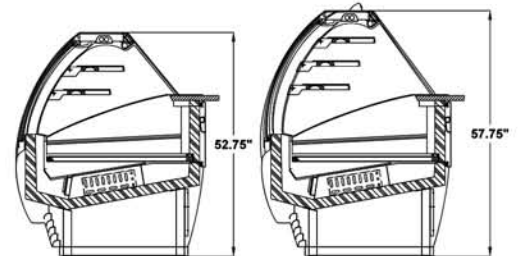

BID SPECIFICATIONS

STANDARD

- * ALL TEMPERED, DOUBLE PANE GLASS FRONT AND SIDES
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- * INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * STAINLESS STEEL WORK SURFACE
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- * REAR PLEXIGLAS SLIDING DOORS
- * AIR-COOLED CONDENSING UNIT

- * UNIQUE FAN ASSISTED AIRFLOW DESIGN
- * LIFT UP FRONT GLASS
- * REFRIGERATED DECK, NON-REFRIGERATED SHELVES
- * SILVER ANODIZED ALUMINUM TRIM
- * MULTIPLEXING CAPABILITY WITH GELATO, PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * THE STANDARD LIMITED WARRANTY INCLUDES:
5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED


OPTIONAL

- * FULLY REFRIGERATED SHOWCASE OPTION
- * DOUBLE PANE SLIDING BACK DOOR AVAILABLE ON LOWER CASE MODEL
- * CASTERS
- * GRANITE WORK SURFACE (OPERATOR SIDE)
- * CHROME STUDS IN FRONT PANEL
- * CHAMPAGNE ANODIZED ALUMINUM TRIM
- * REMOTE CONDENSING UNIT


- * SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)




- * DECORATIVE SIDE PANELS



STANDARD END PANEL




DECORATIVE END PANEL (OPTIONAL)

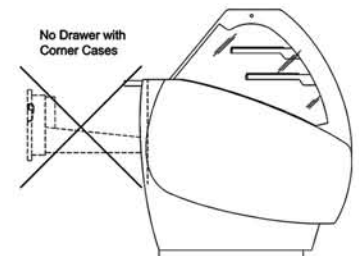


Korea Pastry Curved Refrigerated Case Technical Specifications

Updated Model no.	Old Model No.	Factory Code	Case Height	*Case Length	Case Depth	Crated Weight (lb)	Line Voltage	Breaker Size	Amp Draw	Working Temp F	Comp. HP	Shelves
KP15EXT	C87K-15*EXT	RVS 15A	52.75"	*A & B*	44.33"	1152	115/1/60	20amps	10	38	1/2 HP	2
KP15EXT-T	C87K-15*EXT	RVS 15A	57.75"	*A & B*	44.33"	1152	115/1/60	20amps	10	38	1/2 HP	3
KP15INT	C87K-15*INT	RVS 15C	52.75"	*A & B*	44.33"	1152	115/1/60	20amps	10	38	1/2 HP	2
KP15INT-T	C87K-15*INT	RVS 15C	57.75"	*A & B*	44.33"	1152	115/1/60	20amps	10	38	1/2 HP	3
KP30EXT	C87K-30*EXT	RVS 30A	52.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	2
KP30EXT-T	C87K-30*EXT	RVS 30A	57.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	3
KP30INT	C87K-30*INT	RVS 30C	52.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	2
KP30INT-T	C87K-30*INT	RVS 30C	57.75"	*A & B*	44.33"	1020	115/1/60	20amps	10	38	1/2 HP	3
KP45EXT	C87K-45*EXT	RVS 45A	52.75"	*A & B*	44.33"	844	115/1/60	20amps	10	38	1/2 HP	2
KP45EXT-T	C87K-45*EXT	RVS 45A	57.75"	*A & B*	44.33"	844	115/1/60	20amps	10	38	1/2 HP	3

T = TALL




STANDARD END PANEL



DECORATIVE END PANEL (OPTIONAL)


*Case lengths are specified with standard end panels

A - Customer Side
KP15EXT = 61.04"




B - Server Side
KP15EXT = 49.47"

A - Customer Side
KP15INT = 60.53"




B - Server Side
KP15INT = 72.11"

A - Customer Side
KP30EXT = 61.77"




B - Server Side
KP30EXT = 38.82"

A - Customer Side
KP30INT = 38.11"



B - Server Side
KP30INT = 61.06"

A - Customer Side
KP45EXT = 56.12"



B - Server Side
KP45EXT = 22.56"

PLAN / TOP VIEWS of CORNER CASES

LISTINGS:



ELECTRICAL CONNECTION

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO North America, LLC
33300 Central Avenue
Union City, CA 94587 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-usa.com>