


TRILOGY

CHOCOLATE CURVED SHOWCASE

TC30EXT-GT
TC30EXT-1300
TC30EXT-1500

TC30INT-GT
TC30INT-1300
TC30INT-1500

TC45EXT-GT
TC45EXT-1300
TC45EXT-1500

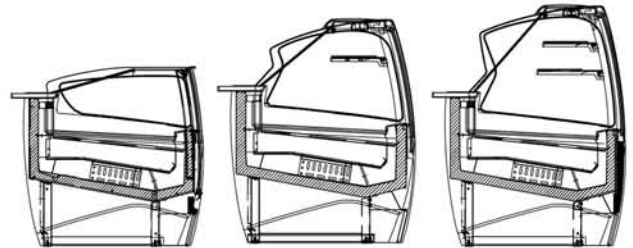

BID SPECIFICATIONS

STANDARD


- * TEMPERED, DOUBLE PANE GLASS ON FRONT AND SIDES
- * FRONT GLASS OPEN UPWARD (1300 & 1500)
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- * INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * STAINLESS STEEL WORK SURFACE
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROST AND HUMIDITY CONTROL
- * REAR PLEXIGLASS SLIDING DOORS
- * AIR-COOLED CONDENSING UNIT
- * UNIQUE FAN ASSISTED AIRFLOW DESIGN

- * SILVER ANODIZED ALUMINUM TRIM
- * REFRIGERATED DECK, NON-REFRIGERATED SHELVES
- * TIERED STAINLESS STEEL DECK
- * MULTIPLEXING CAPABILITY WITH GELATO, PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * THE STANDARD LIMITED WARRANTY INCLUDES:
5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED


OPTIONAL

- * CASTERS
- * GRANITE WORK SURFACE (OPERATOR SIDE)
- * CHAMPAGNE ANODIZED ALUMINUM TRIM
- * REMOTE CONDENSING UNIT
- * DECORATIVE SIDE PANELS

- * SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)



STANDARD END PANEL






DECORATIVE END PANEL (OPTIONAL)

Trilogy Chocolate Curved Refrigerated Case Technical Specifications

Updated Model no.	Old Model No.	Factory Code	Case Height	Case Length	Case Depth	Crated Weight (lb)	Line Voltage	Breaker Size	Amp Draw	Working Temp F	Comp H.P.	Shelves
TC30EXT-GT	C87T-30*EXT	RP 30A	44.00"	*A & B*	44.33"	900	115/1/60	20amps	11	57	1/3 HP	N/A
TC30EXT-1300	C87T-30*EXT	RP 30A	53.75"	*A & B*	44.33"	1020	115/1/60	20amps	11	57	1/3 HP	1
TC30EXT-1500	C87T-30*EXT	RP 30A	59.00"	*A & B*	44.33"	1100	115/1/60	20amps	11	57	1/3 HP	2
TC30INT-GT	C87T-30*INT	RP 30C	44.00"	*A & B*	44.33"	900	115/1/60	20amps	11	57	1/3 HP	N/A
TC30INT-1300	C87T-30*INT	RP 30C	53.75"	*A & B*	44.33"	1020	115/1/60	20amps	11	57	1/3 HP	1
TC30INT-1500	C87T-30*INT	RP 30C	59.00"	*A & B*	44.33"	1100	115/1/60	20amps	11	57	1/3 HP	2
TC45EXT-GT	C87T-45*EXT	RP 45A	44.00"	*A & B*	44.33"	844	115/1/60	20amps	11	57	1/3 HP	N/A
TC45EXT-1300	C87T-45*EXT	RP 45A	53.75"	*A & B*	44.33"	844	115/1/60	20amps	11	57	1/3 HP	1
TC45EXT-1500	C87T-45*EXT	RP 45A	59.00"	*A & B*	44.33"	844	115/1/60	20amps	11	57	1/3 HP	2

* Case lengths are specified with standard end panels

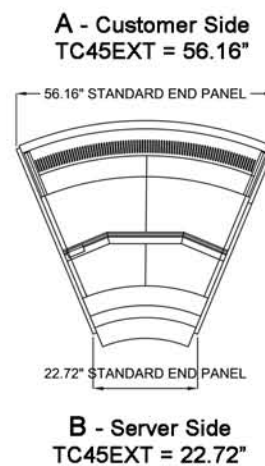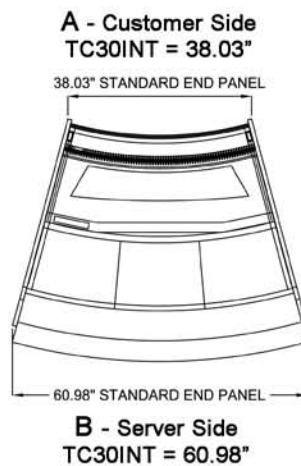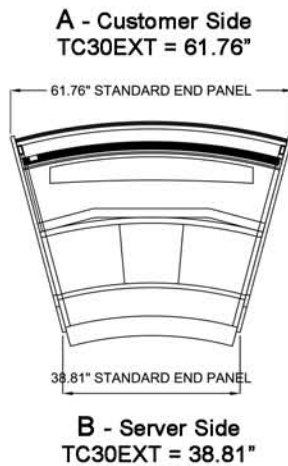

PLAN TOP VIEWS OF CORNER CASES

LISTINGS:



ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO North America, LLC
33300 Central Avenue
Union City, CA 94587 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-usa.com>