


# TRILOGY

## GELATO CURVED SHOWCASE

TG30EXT-GT  
TG30EXT-1300

TG45EXT-GT  
TG45EXT-1300  
TG45EXT-1500

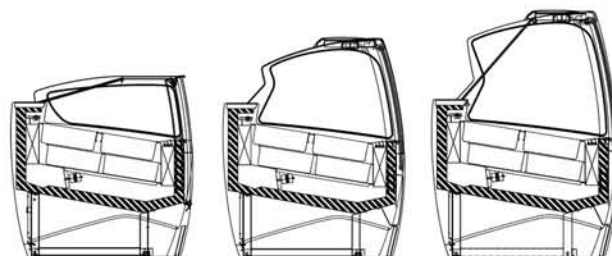

### BID SPECIFICATIONS


STANDARD

- \* TEMPERED, DOUBLE PANE HEATED GLASS ON FRONT AND SIDES
- \* RESERVE PAN STORAGE
- \* HYDRAULIC LIFT UP FRONT GLASS ON 1300 & 1500 MODES
- \* HYDRAULIC TILT BACK ON GT MODEL
- \* GALVANIZED STEEL CHASSIS CONSTRUCTION
- \* INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- \* BACK & INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- \* DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- \* REAR PLEXIGLASS SLIDING DOORS
- \* AIR-COOLED CONDENSING UNIT


- \* UNIQUE FAN ASSISTED AIRFLOW DESIGN
- \* INCLINE DISPLAY
- \* ANODIZED ALUMINUM TRIM
- \* MULTIPLEXING CAPABILITY WITH PASTRY, DELI CHOCOLATE AND HOT CASE APPLICATIONS
- \* STAINLESS STEEL WORK SURFACE
- \* REMOVABLE STAINLESS STEEL DECK
- \* DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- \* DISPLAY CASE(S) HAVE INTERGRATED ELECTRONIC TIME AND TEMPERATURE CONTROLLER(S) WITH HOT GAS DEFROST STANDARD ON GELATO MODELS
- \* THE STANADRD LIMITED WARRANTY INCLUDES: 5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- \* DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED

OPTIONAL

- \* CASTERS
- \* GRANITE WORK SURFACE (OPERATOR SIDE)
- \* CHAMPAGNE ANODIZED ALUMINUM TRIM
- \* REMOTE CONDENSING UNIT
- \* DECORATIVE SIDE PANELS



STANDARD END PANEL




DECORATIVE END PANEL (OPTIONAL)

- \* STAINLESS STEEL TEMPLATE TO ACCOMODATE 2.5 GALLON OR 3 GALLON ROUND ICE CREAM TUBS
- \* PANS NOT INCLUDED




- \* SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)



### Trilogy Gelato / Ice Cream Curved Case Technical Specifications

Updated Model no.	Old Model No.	Factory Code	Case Height	Case Length	Case Depth	Crated Weight (lb)	Line Voltage	Breaker Size	Amp Draw	BTU		Pan Capacity		
										-20° Evap Temp (R404a)	Working Temp F	5 Liter	12 Liter	Comp. HP
TG30EXT-GT	C83FT-30°EXT	GA30	44.00"	*A & B*	44.33"	690	220/1/60	20amps	15	3069	-10 to +10	12	8	1 1/2 HP
TG30EXT-1300	C83FT-30°EXT	GA30	53.75"	*A & B*	44.33"	1020	220/1/60	20amps	15	3069	-10 to +10	12	8	1 1/2 HP
TG45EXT-GT	C83FT-45°EXT	GA45	44.00"	*A & B*	44.33"	998	220/1/60	20amps	15	3069	-10 to +10	9	5	1 1/2 HP
TG45EXT-1300	C83FT-45°EXT	GA45	53.75"	*A & B*	44.33"	844	220/1/60	20amps	15	3069	-10 to +10	9	5	1 1/2 HP
TG45EXT-1500	C83FT-45°EXT	GA45	59.00"	*A & B*	44.33"	844	220/1/60	20amps	15	3069	-10 to +10	9	5	1 1/2 HP

\* Case lengths are specified with standard end panels




STANDARD END PANEL




DECORATIVE END PANEL (OPTIONAL)

A - Customer Side  
TG30EXT = 61.76"

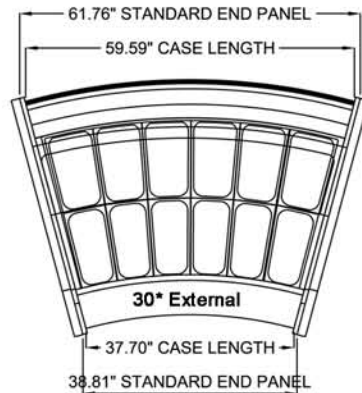

B - Server Side  
TG30EXT = 38.81"

A - Customer Side  
TG45EXT = 56.78"

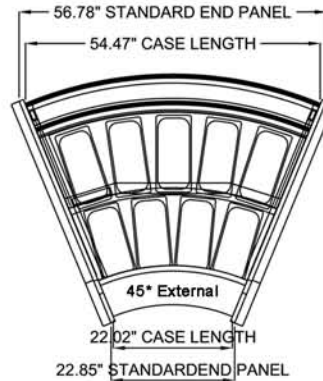

B - Server Side  
TG45EXT = 22.85"

### PLAN / TOP VIEWS OF CORNER CASES

#### LISTINGS:



#### ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation  
Options exist for several NEMA configurations  
Plug and/or receptacle configurations are at the discretion of the electrical installer

#### NOTE:

Required ambient conditions: 75°F; 55% RH  
Drawing and Specifications are subject to change without notice

CLABO North America, LLC  
33300 Central Avenue  
Union City, CA 94587 USA  
PH 800.672.2784  
FAX 510.441.0401  
<http://www.otl-usa.com>