


# TRILOGY

## PASTRY CURVED SHOWCASE

TP30EXT-GT  
TP30EXT-1300  
TP30EXT-1500

TP30INT-GT  
TP30INT-1300  
TP30INT-1500

TP45EXT-GT  
TP45EXT-1300  
TP45EXT-1500

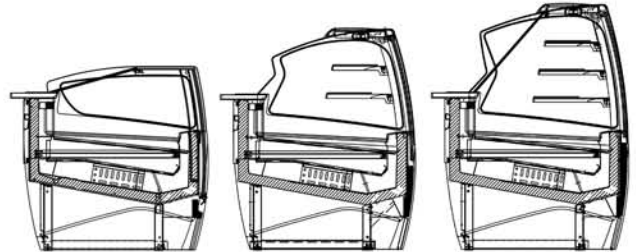

### BID SPECIFICATIONS

STANDARD


- \* TEMPERED, DOUBLE PANE GLASS ON FRONT AND SIDES
- \* HYDRAULIC LIFT UP FRONT GLASS ON 1300 & 1500 MODELS
- \* TILT BACK FRONT GLASS ON GT MODELS
- \* GALVANIZED STEEL CHASSIS CONSTRUCTION
- \* INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- \* INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- \* STAINLESS STEEL WORK SURFACE
- \* DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- \* REAR PLEXIGLASS DOORS

- \* AIR-COOLED CONDENSING UNIT
- \* UNIQUE FAN ASSISTED AIRFLOW DESIGN
- \* SILVER ANODIZED ALUMINUM TRIM
- \* REFRIGERATED DECK, NON-REFRIGERATED SHELVES
- \* MULTIPLEXING CAPABILITY WITH GELATO, PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- \* DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- \* THE STANDARD LIMITED WARRANTY INCLUDES:  
5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- \* DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED


OPTIONAL

- \* CASTERS
- \* GRANITE WORK SURFACE (OPERATOR SIDE)
- \* CHAMPAGNE ANODIZED ALUMINUM TRIM
- \* REMOTE CONDENSING UNIT
- \* DECORATIVE SIDE PANELS

- \* SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)



STANDARD END PANEL




DECORATIVE END PANEL (OPTIONAL)




### Trilogy Pastry Curved Refrigerated Case Technical Specifications

Updated Model no.	Old Model No.	Factory Code	Case Height	Case Length	Case Depth	Crated Weight (lb)	Line Voltage	Breaker Size	Amp Draw	Working Temp F	Comp.H.P.	Shelves
TP30EXT-GT	C87T-30*EXT	RVS 30A	44.00"	*A & B*	44.33"	756	115/1/60	20amps	10	38	1/3 HP	N/A
TP30EXT-1300	C87T-30*EXT	RVS 30A	53.75"	*A & B*	44.33"	800	115/1/60	20amps	10	38	1/3 HP	2
TP30EXT-1500	C87T-30*EXT	RVS 30A	59.00"	*A & B*	44.33"	844	115/1/60	20amps	10	38	1/3 HP	3
TP30INT-GT	C87T-30*INT	RVS 30C	44.00"	*A & B*	44.33"	756	115/1/60	20amps	10	38	1/3 HP	N/A
TP30INT-1300	C87T-30*INT	RVS 30C	53.75"	*A & B*	44.33"	800	115/1/60	20amps	10	38	1/3 HP	2
TP30INT-1500	C87T-30*INT	RVS 30C	59.00"	*A & B*	44.33"	844	115/1/60	20amps	10	38	1/3 HP	3
TP45EXT-GT	C87T-45*EXT	RVS 45A	44.00"	*A & B*	44.33"	624	115/1/60	20amps	10	38	1/3 HP	N/A
TP45EXT-1300	C87T-45*EXT	RVS 45A	53.75"	*A & B*	44.33"	800	115/1/60	20amps	10	38	1/3 HP	2
TP45EXT-1500	C87T-45*EXT	RVS 45A	59.00"	*A & B*	44.33"	712	115/1/60	20amps	10	38	1/3 HP	3


\* Case lengths are specified with standard end panels

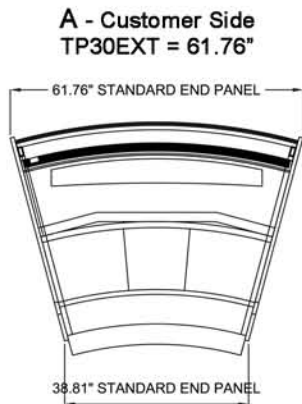

**B - Server Side**  
TP30EXT = 38.81"

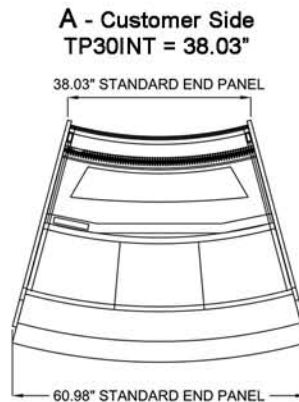

**B - Server Side**  
TP30INT = 60.98"

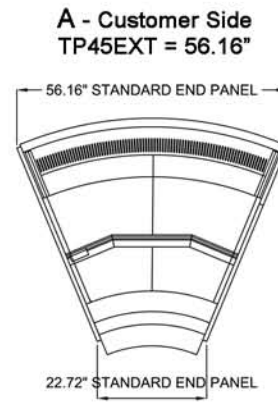

**B - Server Side**  
TP45EXT = 22.72"

### PLAN / TOP VIEWS OF CORNER CASES

#### LISTINGS:



#### ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation  
Options exist for several NEMA configurations  
Plug and/or receptacle configurations are at the discretion of the electrical installer

#### NOTE:

Required ambient conditions: 75°F; 55% RH  
Drawing and Specifications are subject to change without notice

CLABO North America, LLC  
33300 Central Avenue  
Union City, CA 94587 USA  
PH 800.672.2784  
FAX 510.441.0401  
<http://www.otl-usa.com>