


TRILOGY

PASTRY CURVED SHOWCASE

TP30EXT-GT
TP30EXT-1300
TP30EXT-1500

TP30INT-GT
TP30INT-1300
TP30INT-1500

TP45EXT-GT
TP45EXT-1300
TP45EXT-1500

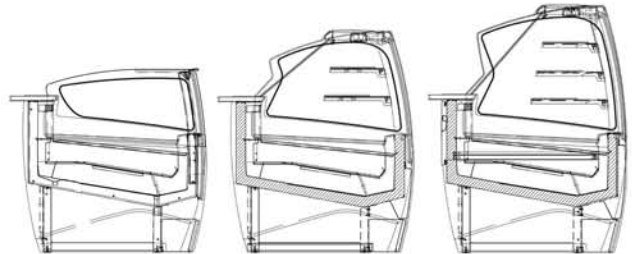

BID SPECIFICATIONS

STANDARD

- * TEMPERED, DOUBLE PANE GLASS ON FRONT AND SIDES
- * HYDRAULIC LIFT UP FRONT GLASS ON 1300 & 1500 MODELS
- * TILT BACK FRONT GLASS ON GT MODELS
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- * INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * STAINLESS STEEL WORK SURFACE
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- * REAR PLEXIGLAS DOORS

- * AIR-COOLED CONDENSING UNIT
- * UNIQUE FAN ASSISTED AIRFLOW DESIGN
- * SILVER ANODIZED ALUMINUM TRIM
- * REFRIGERATED DECK, NON-REFRIGERATED SHELVES
- * MULTIPLEXING CAPABILITY WITH GELATO, PASTRY, DELI, CHOCOLATE AND HOT CASE APPLICATIONS
- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * THE STANDARD LIMITED WARRANTY INCLUDES:
5 YEAR COMPRESSOR: 1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED


OPTIONAL

- * CASTERS
- * GRANITE WORK SURFACE (OPERATOR SIDE)
- * CHAMPAGNE ANODIZED ALUMINUM TRIM
- * REMOTE CONDENSING UNIT
- * DECORATIVE SIDE PANELS

- * SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)



STANDARD END PANEL



DECORATIVE END PANEL (OPTIONAL)

Trilogy Pastry Curved Refrigerated Case Technical Specifications

Updated Model no.	Old Model No.	Factory Code	Case Height	Case Length	Case Depth	Crated Weight (lb)	Line Voltage	Breaker Size	Amp Draw	Working Temp F	Comp.H.P.	Shelves
TP30EXT-GT	C87T-30*EXT	RVS 30A	44.00"	*A & B*	44.33"	756	115/1/60	20amps	10	38	1/3 HP	N/A
TP30EXT-1300	C87T-30*EXT	RVS 30A	53.75"	*A & B*	44.33"	800	115/1/60	20amps	10	38	1/3 HP	2
TP30EXT-1500	C87T-30*EXT	RVS 30A	59.00"	*A & B*	44.33"	844	115/1/60	20amps	10	38	1/3 HP	3
TP30INT-GT	C87T-30*INT	RVS 30C	44.00"	*A & B*	44.33"	756	115/1/60	20amps	10	38	1/3 HP	N/A
TP30INT-1300	C87T-30*INT	RVS 30C	53.75"	*A & B*	44.33"	800	115/1/60	20amps	10	38	1/3 HP	2
TP30INT-1500	C87T-30*INT	RVS 30C	59.00"	*A & B*	44.33"	844	115/1/60	20amps	10	38	1/3 HP	3
TP45EXT-GT	C87T-45*EXT	RVS 45A	44.00"	*A & B*	44.33"	624	115/1/60	20amps	10	38	1/3 HP	N/A
TP45EXT-1300	C87T-45*EXT	RVS 45A	53.75"	*A & B*	44.33"	800	115/1/60	20amps	10	38	1/3 HP	2
TP45EXT-1500	C87T-45*EXT	RVS 45A	59.00"	*A & B*	44.33"	712	115/1/60	20amps	10	38	1/3 HP	3




STANDARD END PANEL




DECORATIVE END PANEL (OPTIONAL)


*Case lengths are specified with standard end panels

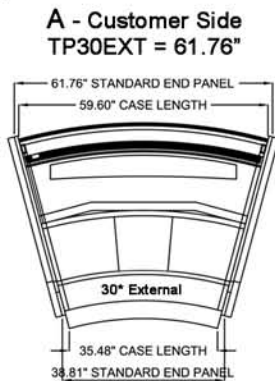

B - Server Side
TP30EXT = 38.81"

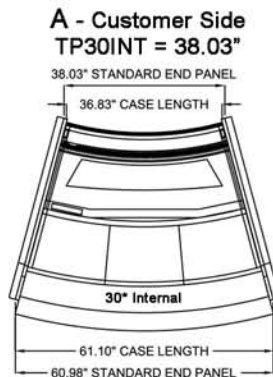

B - Server Side
TP30INT = 60.98"

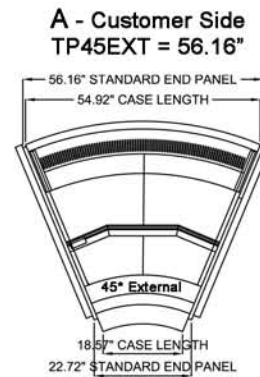

B - Server Side
TP45EXT = 22.72"

PLAN / TOP VIEWS OF CORNER CASES

LISTINGS:



ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO North America, LLC
33300 Central Avenue
Union City, CA 94587 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-usa.com>